

中国·佳木斯防爆电机有限公司

JIAMUSI EXPLOSION-PROOF ELECTRIC MOTOR CO.,LTD



Y、YKS、YKK系列

6KV 高压

三相异步电动机

(H355~630mm)



概述

Y、YKS、YKK系列高压三相异步电动机是我公司采用国内外先进技术，结合我公司生产高压电动机的实践经验而设计制造的优化系列产品，是JS、JSQ老系列高压电机的更新换代产品，与JS、JSQ老系列产品相比，具有结构紧凑、重量轻、高效、节能、噪声低、振动小、可靠性高、使用寿命长、安装维护方便等优点。

本系列电动机适用于驱动各种通风机、压缩机、水泵、破碎机、切屑机床、运输机械等通用机械及其它机械设备，在矿山、机械、石油、化工、电站等各种工矿企业中作原动机用，如用以传动鼓风机、磨煤机、轧钢机、卷扬机、皮带机的电动机在订货时需提供有关技术资料，并要签订技术协议，作为电机特殊设计的依据，以确保电机的可靠运行。

本系列电动机采用F级绝缘，温升按B级考核，额定频率50Hz，额定电压为3kV、6kV，也可按订货要求制造60Hz和其它电压的电动机。

本系列电动机的基本安装型式为卧式带底脚（IMB3）结构。

Y系列为基本系列电动机，YKS、YKK系列是根据电动机的冷却方式和防护等级不同而派生的系列产品，Y、YKS、YKK系列产品特征见表1。

本系列电动机符合国际电工委员会IEC有关标准，符合GB755《旋转电机定额和性能》的规定。

General

Y, YKS and YKK ranges of high - voltage three - phase induction motors are optimum series products which are designed and manufactured by our company using advanced technique at home and abroad, in combination practical experiment of our company on production of high-voltage motors, and are renewing and generation - changing products of former JS and JSQ series high - voltage motors. They have advantages of compact construction, light weight, high efficiency, energy-saving, low noise, small vibration, high reliability, long service life, easy mounting and maintenance, etc., as compared with former JS and JSQ series products.

This range of motors are suitable for driving the general-purpose machineries such as all kinds of ventilators, compressors, water pumps, crushers, cutting machine tools and transportation machineries, etc. as well as other machineries, and act as a motive power machine in all kinds of industrial and mining establishments such as mining, machinery, petroleum, and chemical industries as well as the power plant, etc. If the motors are used to drive the blower, the coal-grinder, the rolling mill, the lifting winch and the belt conveyer, the relevant technical information should be supplied when ordering, and the technical agreement should be signed, which is taken as a basis of special design of motors, thus ensuring the motor to operate reliably.

The motors are class F insulated, but thermally utilized according to class B. Rated frequency is 50Hz, rated voltage is 3kV, 6kV, and the motors of 60Hz and other voltages can also be available on request of ordering.

The basic mounting arrangement of motors of this range is of the horizontally foot-mounted construction (IMB3).

Y is a basic range of motors. YKS and YKK ranges are series products derived according to different methods of cooling and degrees of protection.

The features of YKS and YKK ranges of products are shown in the table 1.

This range of motors conform to the relevant IEC standards and GB755 Rotating Electrical Machines-Ratings and Performances.



表 1 Table 1

系 列 Range	型 号 Enclosure	冷却方式 Method of cooling	防护等级 Degree of protection	冷却结构 Cooling construction
Y	开启式 Opened	IC01	IP23	带通风顶罩和不带顶罩在机座侧板开窗口两种形式 With the ventilating top cover and without the ventilating top cover but making a window in the side plate of frame
	管道通风式 Pipe-ventilated	IC11、IC21、 IC31	IP44	管道通风 Pipe-ventilated
YKS	空 / 水冷却 封闭式 Air-to-water cooled, enclosed	IC81W	IP44 或 IP54	机座顶部带空/水冷却器 Air-to water cooler located at the top of frame
YKK	空 / 空冷却 封闭式 Air-to-air cooled, enclosed	IC611或IC616	IP44 或 IP54	机座顶部带空/空冷却器 Air-to-air cooler located at the top of frame

结构特点

电动机采用箱型结构，机座由钢板焊接成箱形，重量轻、刚度好。机座两侧面及顶部开有窗口，一方面便于电动机的维护保养，另一方面，在顶部安装不同的冷却器，可以派生不同冷却方式和不同防护等级的电动机。

定子采用外装压结构，定子绕组采用F级绝缘材料，绕组端部有可靠的固定及绑扎，并采用真空压力浸渍无溶剂漆工艺（VPI）处理。因此电动机的绝缘性能好，机械强度高，防潮能力强，使用寿命长。

鼠笼转子有铸铝和铜条两种结构，采用先进可靠的铸铝工艺或焊接工艺制造而成，并经过动平衡校验，因此电动机运行平稳可靠。

轴承采用滚动轴承和滑动轴承两种形式，由电动机功率大小和转速高低而定，其防护等级为IP44或IP54，滚动轴承设有不停机注排油装置。

Features of construction

The motors are of box-section construction, the frame is welded into box-section using steel pated, and hence the weight of motors is light and rigidity is good. Two sides and top of the frame are all provided with the windows, which, on the one hand, is convenient to maintain and take care of motors, and on the other hand, can mount different coolers on the top of frame, thus being capable of deriving the motors with different methods of cooling and different degrees of protection.

The motor has a laminated core which is first compressed and secured before it is fitted into the frame and then pressed into the machined frame, the motors have good insulating performance, higher mechanical strength, higher moisture-resistance and longer service life.

The squirrel-cage rotors are of both cast aluminum construction and copper bar construction. The rotors are manufactured using advanced & reliable cast-aluminum and welding process, and are well balanced. Therefore, the motors operate smoothly and reliably.

Rolling bearings or sleeve bearings are used for the motors, depending on the power and speed of motors. Degree of protection is IP44 or IP54. The rolling bearings are provided with grease-filling and-diaining devices without shutdown.




主接线盒置于电动机右侧（从轴伸端看），也可接用户要求置于左侧，接线盒内外均设有单独的接地端子。

根据用户要求，可在定子绕组、轴承等重要部位加设测温装置，便于现场观察和远距离监控，以保证电动机安全可靠地运行。

The main terminal box is located at the right side of the motor (viewed from the shaft extension), and can also be located at the left side on user request. Interior and exterior of the terminal box all are provided with separate earthing terminals.

On user request, the stator winding and the bearing can be provided with temperature-measuring devices so as to be convenient to observe them in site and monitor them in remote distance, thus ensuring the motor to operate safely and reliably.

电动机型号说明 Meaning of the type of motors

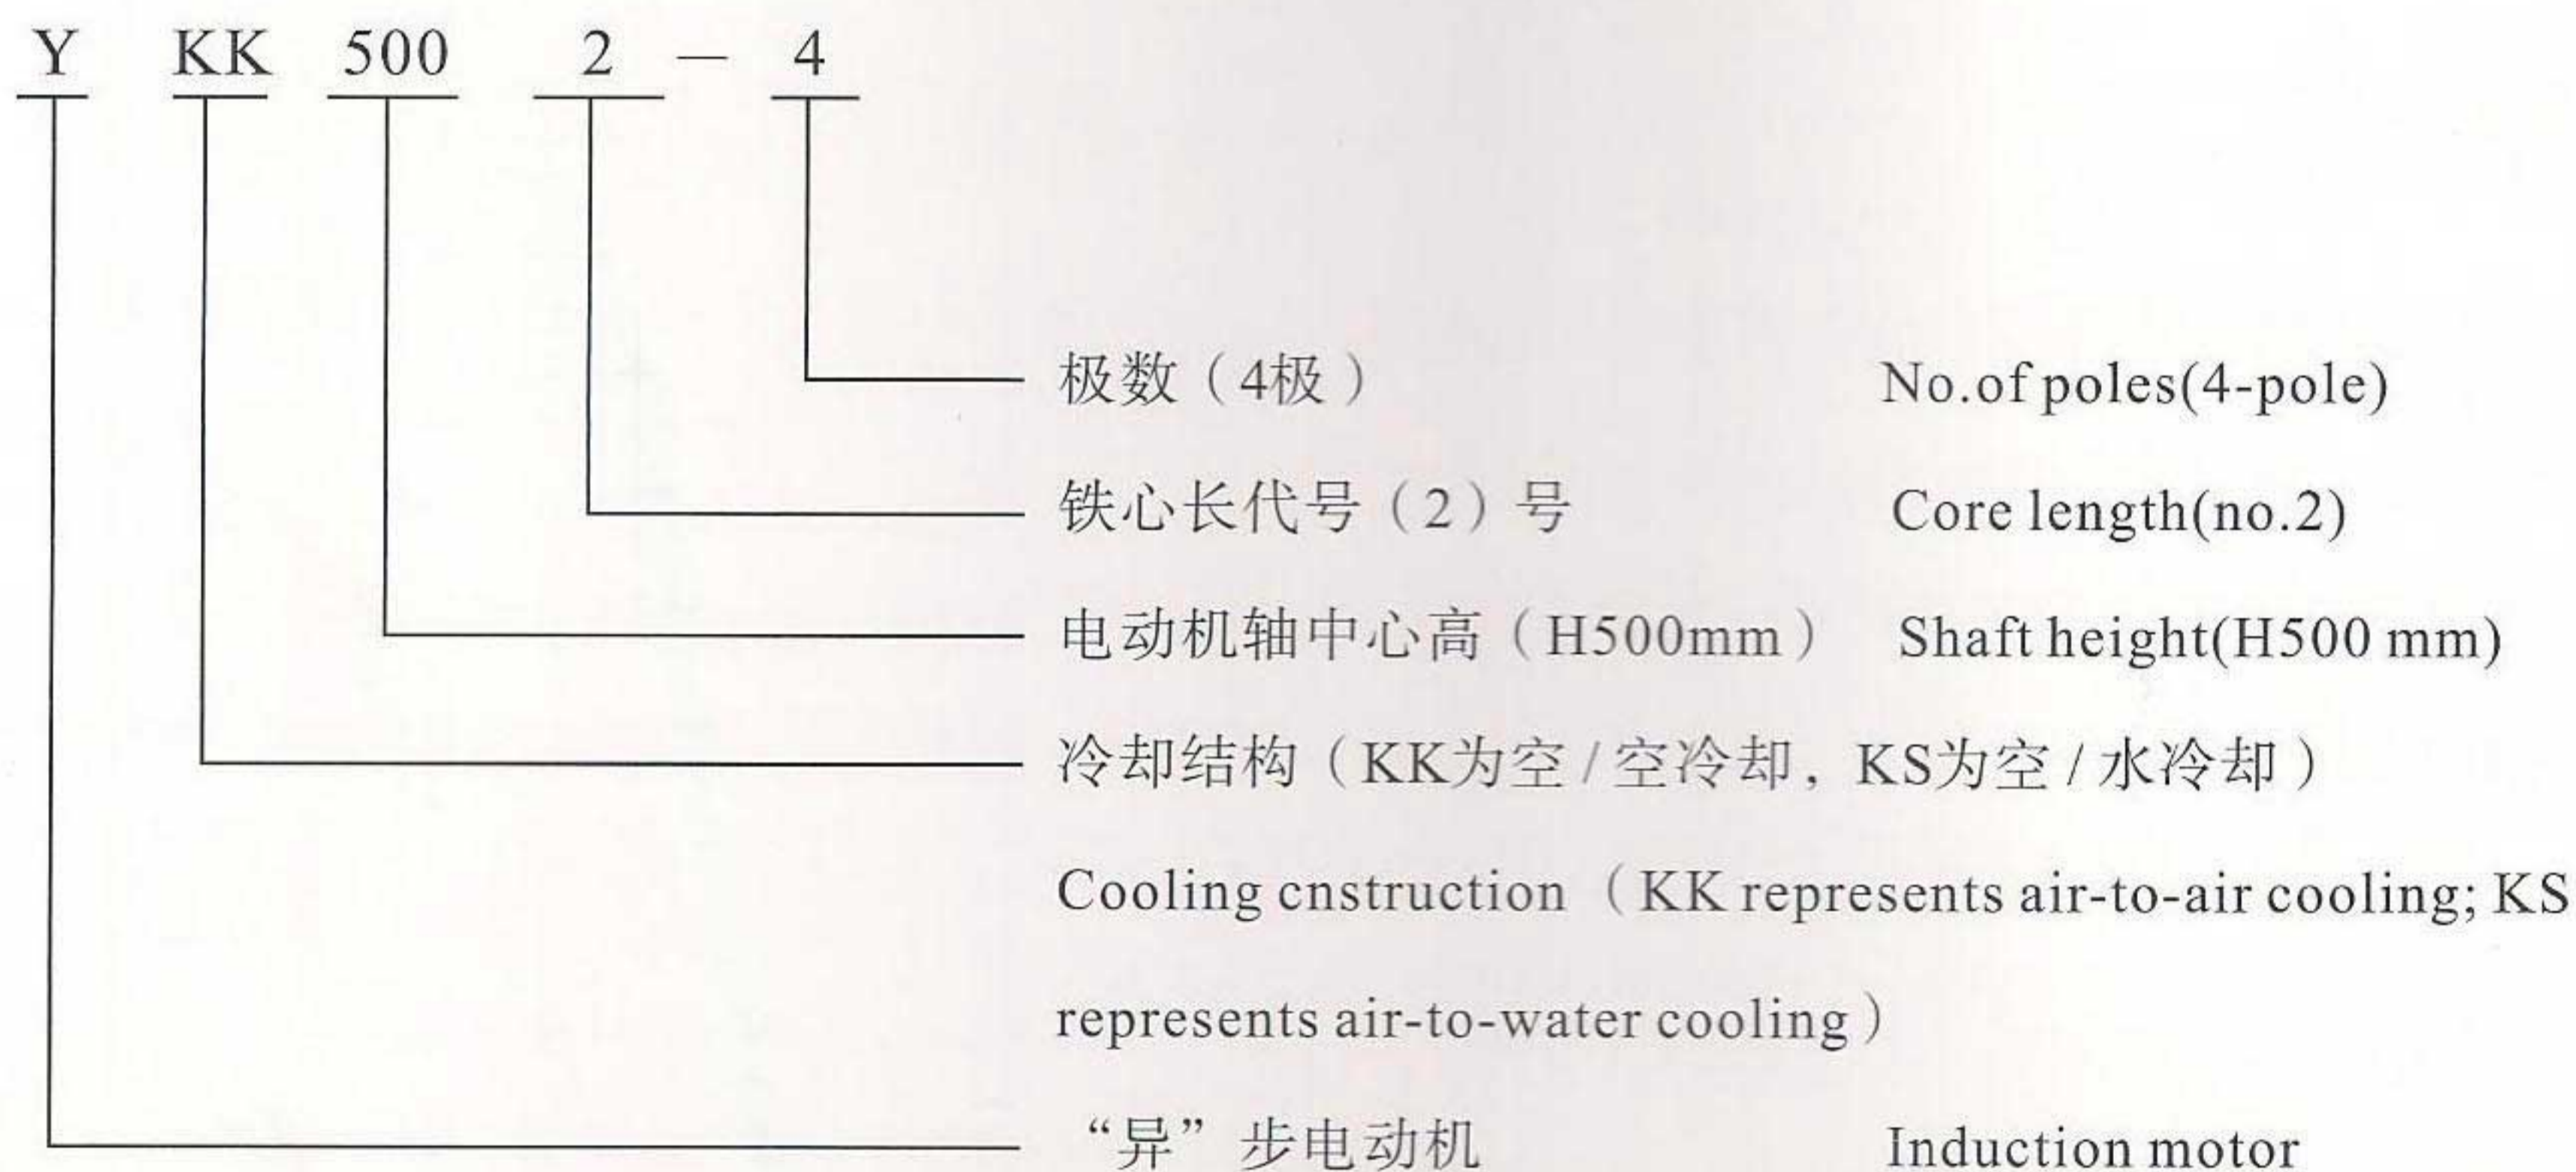

技术数据 (保证值)

Y、YKS系列型高压三相异步电动机 (6kV) 见表2。

YKK系列高压三相异步电动机 (6kV) 见表3。

3kV和其他电压等级的电动机可参照6kV。

Technical data (Guarantee value)

Technical data of Y and YKS ranges of high-voltage three-phase induction motors (6kV) are shown in table 2.

Technical data of YKS ranges of increased-safety high-voltage three-phase induction motors (6kV) are shown in table 3.

The data of electromotor with 3kV of other voltage please consult those of 6kV.



技术数据 (保证值)

Technical data (Guarantee value)

表2 Y、YKS系列高压三相异步电动机技术数据 (6kV)

Table 2 Technical data of Y and YKS ranges of high-voltage three-phase induction motors (6kV)

机座号 Frame size	额定 功率 Rated output (kW)	定子 电流 Stator current (A)	额定 转速 Rated speed (r/min)	效率 Eff. (%)	功率 因数 Power factor (cos φ)	最大转矩	堵转转矩	堵转电流	转动惯量		重量 Weight (kg)	
						额定转矩	额定转矩	额定电流	电机 Motor J _m (kg.m ²)	允许负载 Permis- sible load J (kg.m ²)	Y	YKS
3551-2	220	26.5	2967	92.8	0.86	1.8	0.6	7.0	2.2	22.0	2010	2250
3552-2	250	30.1	2968	92.9	0.86	1.8	0.6	7.0	2.51	24.0	2050	2290
3553-2	280	33.7	2970	93.1	0.86	1.8	0.6	7.0	2.7	26.0	2120	2360
3554-2	315	37.7	2970	93.4	0.86	1.8	0.6	7.0	3.0	27.0	2160	2400
3555-2	355	42.4	2973	93.7	0.86	1.8	0.6	7.0	3.4	27.5	2250	2490
3556-2	400	47.6	2973	94.1	0.86	1.8	0.6	7.0	3.7	28.0	2260	2500
4001-2	450	53.3	2975	94.4	0.86	1.8	0.6	7.0	4.8	32.0	2800	3080
4002-2	500	58.5	2976	94.6	0.87	1.8	0.6	7.0	5.2	33.0	2880	3160
4003-2	560	65.4	2977	94.7	0.87	1.8	0.6	7.0	6.0	34.0	2990	3270
4004-2	630	73.4	2978	94.9	0.87	1.8	0.6	7.0	6.4	35.0	3090	3370
4501-2	710	82.7	2977	95.0	0.87	1.8	0.6	7.0	8.4	42.0	3580	4230
4502-2	800	92.9	2976	95.2	0.87	1.8	0.6	7.0	9.5	44.0	3740	4390
4503-2	900	104.5	2974	95.3	0.87	1.8	0.6	7.0	10.5	46.0	3900	4550
4504-2	1000	114.6	2977	95.4	0.88	1.8	0.6	7.0	11.6	48.0	4060	4710
5001-2	1120	128.2	2978	95.5	0.88	1.8	0.6	7.0	15.9	90.0	4000	4700
5002-2	1250	143.0	2979	95.6	0.88	1.8	0.6	7.0	17.7	100.0	4300	5000
5003-2	1400	160.0	2979	95.7	0.88	1.8	0.6	7.0	19.9	101.0	4600	5300
5004-2	1600	182.6	2978	95.8	0.88	1.8	0.6	7.0	22.0	102.0	4900	5600
5601-2	1800	205.2	2981	95.9	0.88	1.8	0.6	7.0	30.1	106.0	8000	8750
5602-2	2000	227.8	2981	96.0	0.88	1.8	0.6	7.0	33.7	107.0	8250	9000
5603-2	2240	254.9	2982	96.1	0.88	1.8	0.6	7.0	37.8	108.0	8500	9250
6301-2	2500	281.0	2982	96.2	0.89	1.8	0.6	7.0	46.4	118.0	9250	10050
6302-2	2800	314.4	2982	96.3	0.89	1.8	0.6	7.0	50.7	123.0	9650	10450
6303-2	3150	353.7	2983	96.3	0.89	1.8	0.6	7.0	56.1	130.0	10050	10850
3551-4	185	22.8	1477	93.1	0.84	1.8	0.8	6.5	2.5	56.0	1950	2350

续表2 Y、YKS系列高压三相异步电动机技术数据 (6kV)

Table 2 Technical data of Y and YKS ranges of high-voltage three-phase induction motors (6kV)

机座号 Frame size	额定功率 Rated output (kW)	定子电流 Stator current (A)	额定转速 Rated speed (r/min)	效率 Eff. (%)	功率因数 Power factor (cos φ)	最大转矩	堵转转矩	堵转电流	转动惯量		重量 Weight (kg)	
						额定转矩 Breakdown torque Rated torque	额定转矩 Locked-rotor torque Rated torque	额定电流 Locked-rotor current Rated current	电机 Motor J _m (kg.m ²)	允许负载 Permissible load J (kg.m ²)	Y	YKS
3552-4	200	24.6	1477	93.2	0.84	1.8	0.8	6.5	2.7	68.0	1980	2380
3553-4	220	26.7	1477	93.3	0.85	1.8	0.8	6.5	3.0	78.0	2010	2410
3554-4	250	30.3	1478	93.4	0.85	1.8	0.8	6.5	3.5	88.0	2040	2440
3555-4	280	33.5	1478	93.5	0.86	1.8	0.8	6.5	3.8	97.0	2090	2490
3556-4	315	37.7	1478	93.6	0.86	1.8	0.8	6.5	4.0	108.0	2130	2530
4001-4	355	42.3	1485	93.8	0.86	1.8	0.8	6.5	5.8	120.0	2620	3070
4002-4	400	47.6	1486	94.0	0.86	1.8	0.8	6.5	6.0	133.0	2700	3150
4003-4	450	53.5	1485	94.2	0.86	1.8	0.8	6.5	6.5	147.0	2800	3250
4004-4	500	58.6	1485	94.3	0.87	1.8	0.8	6.5	7.0	161.0	2890	3340
4005-4	560	65.5	1485	94.5	0.87	1.8	0.8	6.5	8.0	178.0	3010	3460
4501-4	630	73.5	1485	94.8	0.87	1.8	0.8	6.5	11.0	197.0	3160	3960
4502-4	710	82.7	1485	95.0	0.87	1.8	0.8	6.5	12.0	218.0	3300	4100
4503-4	800	93.0	1486	95.1	0.87	1.8	0.8	6.5	13.0	241.0	3440	4240
4504-4	900	104.6	1487	95.2	0.87	1.8	0.8	6.5	14.0	266.0	3580	4380
5001-4	1000	116.1	1485	95.3	0.87	1.8	0.7	6.5	24.0	290.0	4400	5310
5002-4	1120	128.4	1485	95.4	0.88	1.8	0.7	6.5	26.0	318.0	4500	5410
5003-4	1250	143.1	1485	95.5	0.88	1.8	0.7	6.5	30.0	347.0	4600	5510
5004-4	1400	160.1	1484	95.6	0.88	1.8	0.7	6.5	32.0	380.0	4800	5710
5601-4	1600	180.8	1488	95.7	0.89	1.8	0.6	6.5	57.0	420.0	6225	7150
5602-4	1800	203.1	1488	95.8	0.89	1.8	0.6	6.5	60.0	460.0	6720	7640
5603-4	2000	225.5	1488	95.9	0.89	1.8	0.6	6.5	66.0	498.0	7150	8100
6301-4	2240	252.3	1488	96.0	0.89	1.8	0.6	6.5	102.0	540.0	9250	10050
6302-4	2500	281.3	1488	96.1	0.89	1.8	0.6	6.5	112.0	584.0	9650	10650
6303-4	2800	314.7	1488	96.2	0.89	1.8	0.6	6.5	116.0	631.0	10450	11400
3553-6	185	23.7	987	92.6	0.81	1.8	0.8	6.0	5.2	160.0	2060	2460



续表2 Y、YKS系列高压三相异步电动机技术数据(6kV)

Table 2 Technical data of Y and YKS ranges of high-voltage three-phase induction motors (6kV)

机座号 Frame size	额定 功率 Rated output (kW)	定子 电流 Stator current (A)	额定 转速 Rated speed (r/min)	效率 Eff. (%)	功率 因数 Power factor (cos φ)	最大转矩	堵转转矩	堵转电流	转动惯量		重量 Weight (kg)	
						额定转矩	额定转矩	额定电流	电机 Motor J _m (kg.m ²)	允许负载 Permis- sible load J (kg.m ²)	Y	YKS
3554-6	200	25.6	987	92.8	0.81	1.8	0.8	6.0	5.6	190	2100	2500
3555-6	220	27.8	987	93.0	0.82	1.8	0.8	6.0	6.0	210	2140	2540
3556-6	250	31.4	987	93.3	0.82	1.8	0.8	6.0	7.0	236	2170	2570
4002-6	280	34.7	988	93.5	0.83	1.8	0.8	6.0	10.0	262	2590	3040
4003-6	315	39.0	988	93.7	0.83	1.8	0.8	6.0	11.0	291	2690	3140
4004-6	355	43.8	988	93.9	0.83	1.8	0.8	6.0	11.5	324	2770	3220
4005-6	400	49.3	988	94.0	0.83	1.8	0.8	6.0	12.0	361	2980	3430
4501-6	450	54.7	988	94.3	0.84	1.8	0.8	6.0	15.0	401	3110	3910
4502-6	500	59.9	988	94.5	0.85	1.8	0.8	6.0	16.0	440	3240	4040
4503-6	560	66.9	988	94.7	0.85	1.8	0.8	6.0	17.0	487	3370	4170
4504-6	630	75.2	989	94.8	0.85	1.8	0.8	6.0	20.0	540	3490	4290
5001-6	710	84.6	990	95.0	0.85	1.8	0.7	6.0	32.0	599	4100	5010
5002-6	800	95.3	989	95.1	0.85	1.8	0.7	6.0	34.0	665	4200	5110
5003-6	900	107.0	989	95.2	0.85	1.8	0.7	6.0	40.0	736	4500	5410
5004-6	1000	118.8	989	95.3	0.85	1.8	0.7	6.0	47.0	805	4700	5610
5601-6	1120	131.4	990	95.4	0.86	1.8	0.7	6.5	70.0	886	6185	7000
5602-6	1250	146.5	990	95.5	0.86	1.8	0.7	6.5	75.0	972	6415	7300
5603-6	1400	163.9	990	95.6	0.86	1.8	0.7	6.5	82.0	1068	6670	7500
6301-6	1600	187.1	991	95.7	0.86	1.8	0.7	6.5	117.0	1192	9300	10300
6302-6	1800	210.2	991	95.8	0.86	1.8	0.7	6.5	132.0	1312	9720	10720
6303-6	2000	233.3	991	95.9	0.86	1.8	0.7	6.5	143.0	1428	10550	11550
4001-8	185	25.0	741	92.6	0.77	1.8	0.8	5.5	9.0	383	2480	2930
4002-8	200	26.6	741	92.8	0.78	1.8	0.8	5.5	10.0	401	2570	3020
4003-8	220	29.2	741	92.9	0.78	1.8	0.8	5.5	11.0	424	2650	3100
4004-8	250	32.7	741	93.0	0.79	1.8	0.8	5.5	12.0	477	2760	3210



续表2 Y、YKS系列高压三相异步电动机技术数据 (6kV)

Table 2 Technical data of Y and YKS ranges of high-voltage three-phase induction motors (6kV)

机座号 Frame size	额定功率 Rated output (kW)	定子电流 Stator current (A)	额定转速 Rated speed (r/min)	效率 Eff. (%)	功率因数 Power factor (cos φ)	最大转矩	堵转转矩	堵转电流	转动惯量		重量 Weight (kg)	
						额定转矩 Breakdown torque Rated torque	额定转矩 Locked-rotor torque Rated torque	额定电流 Locked-rotor current Rated current	电机 Motor J _m (kg.m ²)	允许负载 Permissible load J (kg.m ²)	Y	YKS
4005-8	280	36.6	741	93.2	0.79	1.8	0.8	5.5	13.0	529	2890	3340
4501-8	315	40.6	742	93.4	0.80	1.8	0.8	5.5	16.0	588	3140	3940
4502-8	355	45.7	742	93.5	0.80	1.8	0.8	5.5	17.0	656	3290	4090
4503-8	400	51.3	742	93.7	0.80	1.8	0.8	5.5	18.0	731	3340	4140
4504-8	450	57.0	742	93.8	0.81	1.8	0.8	5.5	19.0	813	3470	4270
5001-8	500	63.0	742	94.3	0.81	1.8	0.8	5.5	30.0	894	4000	4910
5002-8	560	69.6	742	94.4	0.82	1.8	0.8	5.5	34.0	988	4150	5060
5003-8	630	78.2	743	94.5	0.82	1.8	0.8	5.5	38.0	1098	4350	5260
5004-8	710	88.1	744	94.6	0.82	1.8	0.8	5.5	42.0	1222	4500	5410
5601-8	800	96.8	743	94.7	0.84	1.8	0.7	6.0	87.0	1357	6130	7100
5602-8	900	108.8	743	94.8	0.84	1.8	0.7	6.0	92.0	1505	6325	7250
5603-8	1000	120.7	743	94.9	0.84	1.8	0.7	6.0	102	1650	6473	7330
6301-8	1120	135.1	744	95.0	0.84	1.8	0.7	6.0	137	1820	9620	10620
6302-8	1250	150.6	744	95.1	0.84	1.8	0.7	6.0	151	2001	10200	11200
6303-8	1400	168.5	744	95.2	0.84	1.8	0.7	6.0	160	2204	10570	11570
6304-8	1600	192.3	744	95.3	0.84	1.8	0.7	6.0	168	2468	10920	11920
4004-10	185	25.9	593	91.7	0.75	1.8	0.8	5.5	11.0	529	2760	3210
4005-10	200	27.9	593	91.9	0.75	1.8	0.8	5.5	12.0	551	2890	3340
4501-10	220	29.9	592	92.1	0.77	1.8	0.8	5.5	19.0	729	3060	3860
4502-10	250	33.4	592	92.3	0.78	1.8	0.8	5.5	20.0	820	3140	3940
4503-10	280	37.3	592	92.5	0.78	1.8	0.8	5.5	22.0	910	3270	4070
4504-10	315	41.4	592	92.6	0.79	1.8	0.8	5.5	24.0	1014	3330	4130
4505-10	355	46.6	592	92.8	0.79	1.8	0.8	5.5	25.0	1131	3450	4250
5001-10	400	51.6	592	93.3	0.80	1.8	0.8	5.5	36.0	1261	4000	4910
5002-10	450	58.0	593	93.4	0.80	1.8	0.8	5.0	38.0	1404	4150	5060



续表2 Y、YKS系列高压三相异步电动机技术数据 (6kV)

Table 2 Technical data of Y and YKS ranges of high-voltage three-phase induction motors (6kV)

机座号 Frame size	额定功率 Rated output (kW)	定子电流 Stator current (A)	额定转速 Rated speed (r/min)	效率 Eff. (%)	功率因数 Power factor (cos φ)	最大转矩	堵转转矩	堵转电流	转动惯量		重量 Weight (kg)	
						额定转矩 Breakdown torque Rated torque	额定转矩 Locked-rotor torque Rated torque	额定电流 Locked-rotor current Rated current	电机 Motor J _m (kg.m ²)	允许负载 Permissible load J (kg.m ²)	Y	YKS
5003-10	500	64.3	594	93.6	0.80	1.8	0.7	5.5	42.0	1544	4300	5210
5004-10	560	71.9	594	93.7	0.80	1.8	0.7	5.5	45.0	1711	4450	5315
5005-10	630	80.8	595	93.8	0.80	1.8	0.7	5.5	52.0	1902	4650	5500
5601-10	710	88.6	593	94.0	0.82	1.8	0.7	6.0	79.0	2116	6460	7100
5602-10	800	99.7	593	94.2	0.82	1.8	0.7	6.0	88.0	2355	6360	7220
5603-10	900	112.0	593	94.3	0.82	1.8	0.7	6.0	93.0	2615	6570	7510
6301-10	1000	124.3	594	94.4	0.82	1.8	0.7	6.0	140	2870	9620	10620
6302-10	1120	138.9	594	94.6	0.82	1.8	0.7	6.0	152	3170	10200	11200
6303-10	1250	154.7	594	94.8	0.82	1.8	0.7	6.0	167	3489	10570	11570
6304-10	1400	173.1	594	94.9	0.82	1.8	0.7	6.0	175	3850	10930	11930
4502-12	185	27.2	494	90.9	0.72	1.8	0.8	5.5	19.0	997	3170	3970
4503-12	200	29.3	494	91.1	0.72	1.8	0.8	5.5	21.0	1078	3260	4060
4504-12	220	31.7	494	91.4	0.73	1.8	0.8	5.5	24.0	1135	3340	4140
4505-12	250	35.9	494	91.7	0.73	1.8	0.8	5.5	26.0	1277	3410	4210
5001-12	280	39.3	493	92.7	0.74	1.8	0.8	5.5	40.0	1418	4000	4900
5002-12	315	43.6	493	92.8	0.75	1.8	0.8	5.5	42.0	1580	4100	7000
5003-12	355	49.0	494	93.0	0.75	1.8	0.8	5.5	43.0	1764	4250	5150
5004-12	400	55.0	494	93.3	0.75	1.8	0.8	5.5	47.0	1967	4400	5300
5005-12	450	61.8	495	93.4	0.75	1.8	0.8	5.5	50.0	2191	4550	5450
5601-12	500	65.0	495	93.7	0.79	1.8	0.7	6.0	103	2411	6160	7060
5602-12	560	72.7	495	93.8	0.79	1.8	0.7	6.0	114	2673	6360	7310
5603-12	630	81.7	495	93.9	0.79	1.8	0.7	6.0	127	2974	6570	7430
6301-12	710	92.0	495	94.0	0.79	1.8	0.7	6.0	191	3312	9600	11600
6302-12	800	103.4	495	94.2	0.79	1.8	0.7	6.0	208	3688	10050	11050
6303-12	900	116.2	495	94.3	0.79	1.8	0.7	6.0	227	4098	10450	11450
6304-12	1000	129.0	495	94.4	0.79	1.8	0.7	6.0	239	4502	10820	11820



表3 YKK系列高压三相异步电动机技术数据 (6kV)

Table 3 Technical data of YKK ranges of high-voltage three-phase induction motors (6kV)

型号 Type	额定功率 Rated output (kW)	定子电流 Stator current (A)	额定转速 Rated speed (r/min)	效率 Eff. (%)	功率因数 Power factor (cos φ)	最大转矩	堵转转矩	堵转电流	转动惯量		重量 Weight (kg)
						额定转矩 Breakdown torque Rated torque	额定转矩 Locked-rotor torque Rated torque	额定电流 Locked-rotor current Rated current	电机 Motor J _m (kg.m ²)	允许负载 Permissible load J (kg.m ²)	
YKK3551-2	220	26.9	2973	92.5	0.85	1.8	0.6	7.0	2.7	22.0	2250
YKK3552-2	250	30.6	2972	92.6	0.85	1.8	0.6	7.0	3.0	24.0	2300
YKK3553-2	280	34.2	2973	92.8	0.85	1.8	0.6	7.0	3.4	26.0	2350
YKK3554-2	315	38.3	2975	93.1	0.85	1.8	0.6	7.0	3.6	27.0	2400
YKK4003-2	355	42.5	2977	93.4	0.86	1.8	0.6	7.0	5.3	30.0	2700
YKK4004-2	400	47.8	2976	93.7	0.86	1.8	0.6	7.0	5.7	32.0	2780
YKK4005-2	450	53.6	2975	94.0	0.86	1.8	0.6	7.0	6.5	34.0	2900
YKK4006-2	500	59.4	2976	94.2	0.86	1.8	0.6	7.0	6.8	35.0	2950
YKK4502-2	560	66.4	2980	94.4	0.86	1.8	0.6	7.0	9.4	40.0	4000
YKK4503-2	630	73.7	2980	94.6	0.87	1.8	0.6	7.0	10.8	44.0	4300
YKK4504-2	710	82.9	2981	94.7	0.87	1.8	0.6	7.0	11.8	46.0	4600
YKK4505-2	800	93.3	2983	94.8	0.87	1.8	0.6	7.0	12.4	48.0	4900
YKK5001-2	900	104.8	2981	95.0	0.87	1.8	0.6	7.0	17.2	73.4	5200
YKK5002-2	1000	116.3	2983	95.1	0.87	1.8	0.6	7.0	19.1	85.0	5440
YKK5003-2	1120	130.1	2982	95.2	0.87	1.8	0.6	7.0	21.1	93.0	5650
YKK5004-2	1250	145.1	2980	95.3	0.87	1.8	0.6	7.0	23.0	101.0	5880
YKK5601-2	1400	160.5	2980	95.4	0.88	1.8	0.6	7.0	39.8	106.0	6800
YKK5602-2	1600	183.1	2979	95.5	0.88	1.8	0.6	7.0	42.4	107.0	6900
YKK5603-2	1800	205.9	2982	95.6	0.88	1.8	0.6	7.0	46.4	108.0	7160
YKK6301-2	2000	228.5	2982	95.7	0.88	1.8	0.6	7.0	47.4	110.0	9450
YKK6302-2	2240	255.7	2982	95.8	0.88	1.8	0.6	7.0	51.7	114.0	9850
YKK6303-2	2500	285.1	2982	95.9	0.88	1.8	0.6	7.0	57.1	120.0	10250
YKK3551-4	185	22.6	1483	92.8	0.85	1.8	0.7	6.5	3.0	68.0	2500



续表3 YKK系列高压三相异步电动机技术数据 (6kV)

Table 3 Technical data of YKK ranges of high-voltage three-phase induction motors (6kV)

型号 Type	额定功率 Rated output (kW)	定子电流 Stator current (A)	额定转速 Rated speed (r/min)	效率 Eff. (%)	功率因数 Power factor ($\cos \phi$)	最大转矩	堵转转矩	堵转电流	转动惯量		重量 Weight (kg)
						额定转矩 Breakdown torque Rated torque	额定转矩 Locked-rotor torque Rated torque	额定电流 Locked-rotor current Rated current	电机 Motor J _m (kg.m ²)	允许负载 Permissible load J (kg.m ²)	
YKK3552-4	200	24.4	1483	92.9	0.85	1.8	0.7	6.5	3.4	78.0	2550
YKK3553-4	220	26.8	1483	93.0	0.85	1.8	0.7	6.5	3.8	88.0	2600
YKK3554-4	250	30.4	1482	93.1	0.85	1.8	0.7	6.5	4.2	97.0	2650
YKK4002-4	280	33.6	1482	93.2	0.86	1.8	0.7	6.5	5.8	108	2640
YKK4003-4	315	37.8	1483	93.3	0.86	1.8	0.7	6.5	6.0	120	2800
YKK4004-4	355	42.5	1483	93.5	0.86	1.8	0.7	6.5	6.2	133	2870
YKK4005-4	400	47.8	1482	93.7	0.86	1.8	0.7	6.5	6.5	147	2990
YKK4006-4	450	53.6	1483	93.9	0.86	1.8	0.7	6.5	7.0	161	3060
YKK4502-4	500	59.5	1485	94.0	0.86	1.8	0.7	6.5	10.0	178	4400
YKK4503-4	560	66.5	1485	94.2	0.86	1.8	0.7	6.5	11.0	197	4560
YKK4504-4	630	74.7	1484	94.4	0.86	1.8	0.7	6.5	12.0	218	4720
YKK4505-4	710	84.0	1484	94.6	0.86	1.8	0.7	6.5	13.0	241	4890
YKK5001-4	800	93.3	1486	94.8	0.87	1.8	0.7	6.5	22.0	266	5640
YKK5002-4	900	104.9	1486	94.9	0.87	1.8	0.7	6.5	24.0	290	5660
YKK5003-4	1000	116.4	1486	95.0	0.87	1.8	0.7	6.5	26.0	318	5850
YKK5004-4	1120	130.3	1486	95.1	0.87	1.8	0.7	6.5	30.0	347	6030
YKK5601-4	1250	143.6	1488	95.2	0.88	1.8	0.6	6.5	51.0	379	7800
YKK5602-4	1400	160.6	1487	95.3	0.88	1.8	0.6	6.5	57.0	470	8050
YKK5603-4	1600	183.4	1488	95.4	0.88	1.8	0.6	6.5	60.0	460	8300
YKK6301-4	1800	206.1	1489	95.5	0.88	1.8	0.6	6.5	96.0	498	10400
YKK6302-4	2000	228.8	1488	95.6	0.88	1.8	0.6	6.5	102.0	540	10800
YKK6303-4	2240	255.9	1488	95.7	0.88	1.8	0.6	6.5	112.0	584	11200
YKK4001-6	185	23.5	988	92.4	0.82	1.8	0.7	6.0	8.0	193	2610



续表3 YKK系列高压三相异步电动机技术数据 (6kV)

Table 3 Technical data of YKK ranges of high-voltage three-phase induction motors (6kV)

型号 Type	额定功率 Rated output (kW)	定子电流 Stator current (A)	额定转速 Rated speed (r/min)	效率 Eff. (%)	功率因数 Power factor (cos φ)	最大转矩	堵转转矩	堵转电流	转动惯量		重量 Weight (kg)
						额定转矩 Breakdown torque Rated torque	额定转矩 Locked-rotor torque Rated torque	额定电流 Locked-rotor current Rated current	电机 Motor J _m (kg.m ²)	允许负载 Permissible load J (kg.m ²)	
YKK4002-6	200	25.3	988	92.6	0.82	1.8	0.7	6.0	8.7	210	2665
YKK4003-6	220	27.8	988	92.8	0.82	1.8	0.7	6.0	9.0	236	2700
YKK4004-6	250	31.5	988	93.0	0.82	1.8	0.7	6.0	10.0	262	2750
YKK4005-6	280	35.2	988	93.3	0.82	1.8	0.7	6.0	10.8	291	2895
YKK4006-6	315	39.5	988	93.5	0.82	1.8	0.7	6.0	11.0	324	3020
YKK4502-6	355	43.9	988	93.7	0.83	1.8	0.7	6.0	14.0	361	4380
YKK4503-6	400	49.4	987	93.8	0.83	1.8	0.7	6.0	15.0	401	4540
YKK4504-6	450	55.4	988	94.1	0.83	1.8	0.7	6.0	16.0	440	4690
YKK4505-6	500	61.5	989	94.3	0.83	1.8	0.7	6.0	17.0	687	4810
YKK5001-6	560	68.0	990	94.4	0.84	1.8	0.7	6.0	27.0	540	5355
YKK5002-6	630	76.4	990	94.5	0.84	1.8	0.7	6.0	32.5	599	5440
YKK5003-6	710	85.8	990	94.8	0.84	1.8	0.7	6.0	34.0	665	5700
YKK5004-6	800	96.6	990	94.9	0.84	1.8	0.7	6.0	40.0	736	5880
YKK5601-6	900	107.2	991	95.0	0.85	1.8	0.7	6.5	64.0	805	7500
YKK5602-6	1000	119.0	991	95.1	0.85	1.8	0.7	6.5	70.0	886	7850
YKK5603-6	1120	133.2	990	95.2	0.85	1.8	0.7	6.5	75.0	927	8100
YKK6301-6	1250	146.8	991	95.3	0.86	1.8	0.7	6.5	139	1068	10750
YKK6302-6	1400	164.2	991	95.4	0.86	1.8	0.7	6.5	147	1192	11150
YKK6303-6	1600	187.5	991	95.5	0.86	1.8	0.7	6.5	162	1312	11500
YKK4004-8	185	24.7	740	92.5	0.78	1.8	0.8	5.5	11.0	406	2785
YKK4005-8	200	26.6	740	92.7	0.78	1.8	0.8	5.5	12.0	450	2840
YKK4006-8	220	29.2	740	92.9	0.78	1.8	0.8	5.5	13.0	502	2910
YKK4502-8	250	32.7	741	93.0	0.79	1.8	0.8	5.5	16.0	558	4560



续表3 YKK系列高压三相异步电动机技术数据 (6kV)

Table 3 Technical data of YKK ranges of high-voltage three-phase induction motors (6kV)

型号 Type	额定功率 Rated output (kW)	定子电流 Stator current (A)	额定转速 Rated speed (r/min)	效率 Eff. (%)	功率因数 Power factor (cos φ)	最大转矩	堵转转矩	堵转电流	转动惯量		重量 Weight (kg)
						额定转矩 Breakdown torque Rated torque	额定转矩 Locked-rotor torque Rated torque	额定电流 Locked-rotor current Rated current	电机 Motor J _m (kg.m ²)	允许负载 Permissible load J (kg.m ²)	
YKK4503-8	280	36.6	741	93.2	0.79	1.8	0.8	5.5	17.0	622	4650
YKK4504-8	315	41.1	742	93.4	0.79	1.8	0.8	5.5	18.0	693	4740
YKK4505-8	355	46.2	743	93.5	0.79	1.8	0.8	5.5	19.0	772	4840
YKK5001-8	400	51.3	743	93.7	0.80	1.8	0.8	5.5	30.0	853	5110
YKK5002-8	450	57.7	743	93.8	0.80	1.8	0.8	5.5	34.0	941	5280
YKK5003-8	500	63.8	743	94.2	0.80	1.8	0.8	5.5	38.0	1044	5430
YKK5004-8	560	71.4	743	94.4	0.80	1.8	0.8	5.5	42.0	1160	5660
YKK5601-8	630	78.2	743	94.5	0.82	1.8	0.7	6.0	79.0	1221	7500
YKK5602-8	710	88.1	743	94.6	0.82	1.8	0.7	6.0	87.0	1357	7750
YKK5603-8	800	99.1	743	94.7	0.82	1.8	0.7	6.0	90.0	150.5	8000
YKK6301-8	900	108.8	744	94.8	0.84	1.8	0.7	6.0	129	1650	10400
YKK6302-8	1000	120.7	744	94.9	0.84	1.8	0.7	6.0	137	1820	10800
YKK6303-8	1120	135.1	744	95.0	0.84	1.8	0.7	6.0	151	2001	1120
YKK6304-8	1250	150.6	744	95.1	0.84	1.8	0.7	6.0	160	2204	11600
YKK4501-10	185	25.9	594	91.7	0.75	1.8	0.8	5.5	19.0	698	4580
YKK4502-10	200	27.9	594	91.9	0.75	1.8	0.8	5.5	20.0	7750	4670
YKK4503-10	220	30.6	594	92.1	0.75	1.8	0.8	5.5	22.0	865	4760
YKK4504-10	250	34.8	593	92.3	0.75	1.8	0.8	5.5	24.0	902	4860
YKK4505-10	280	38.8	594	92.5	0.75	1.8	0.8	5.5	26.0	1072	4960
YKK5001-10	315	43.0	593	92.8	0.76	1.8	0.8	5.5	36.0	1196	5220
YKK5002-10	355	48.3	593	93.0	0.76	1.8	0.8	5.5	38.0	1332	5375
YKK5003-10	400	54.3	593	93.3	0.76	1.8	0.8	5.5	42.0	1471	5535
YKK5004-10	450	61.0	593	93.4	0.76	1.8	0.8	5.5	45.0	1627	5760



续表3 YKK系列高压三相异步电动机技术数据 (6kV)


Table 3 Technical data of YKK ranges of high-voltage three-phase induction motors (6kV)

型号 Type	额定功率 Rated output (kW)	定子电流 Stator current (A)	额定转速 Rated speed (r/min)	效率 Eff. (%)	功率因数 Power factor (cos φ)	最大转矩	堵转转矩	堵转电流	转动惯量		重量 Weight (kg)
						额定转矩 Breakdown torque Rated torque	额定转矩 Locked-rotor torque Rated torque	额定电流 Locked-rotor current Rated current	电机 Motor J _m (kg.m ²)	允许负载 Permissible load J (kg.m ²)	
YKK5601-10	500	65.9	593	93.6	0.78	1.8	0.7	6.0	67.0	1710	7470
YKK5602-10	560	73.7	594	93.7	0.78	1.8	0.7	6.0	74.0	1902	7690
YKK5603-10	630	82.9	593	93.8	0.78	1.8	0.7	6.0	79.0	2116	7920
YKK5604-10	710	93.2	594	94.0	0.78	1.8	0.7	6.0	88.0	2355	8140
YKK6301-10	800	102.1	594	94.2	0.80	1.8	0.7	6.0	132	2615	10600
YKK6302-10	900	114.8	594	94.3	0.80	1.8	0.7	6.0	140	2800	11000
YKK6303-10	1000	127.4	594	94.4	0.80	1.8	0.7	6.0	152	3170	11400
YKK6304-10	1120	142.4	594	94.6	0.80	1.8	0.7	6.0	167	3489	11800
YKK4504-12	185	27.7	494	91.8	0.70	1.8	0.8	5.5	24.0	1487	4770
YKK4505-12	200	29.9	494	92.0	0.70	1.8	0.8	5.5	26.0	1206	4950
YKK5001-12	220	31.9	494	92.2	0.72	1.8	0.8	5.5	40.0	1347	5090
YKK5002-12	250	36.1	494	92.5	0.72	1.8	0.8	5.5	42.0	1499	5340
YKK5003-12	280	40.4	494	92.7	0.72	1.8	0.8	5.5	43.0	1672	5410
YKK5004-12	315	45.4	494	92.8	0.72	1.8	0.8	5.5	47.0	1865	5660
YKK5601-12	355	49.6	495	93.0	0.74	1.8	0.7	6.0	87.0	1967	7440
YKK5602-12	400	55.7	495	93.3	0.74	1.8	0.7	6.0	96.0	2190	7650
YKK5603-12	450	62.7	495	93.4	0.74	1.8	0.7	6.0	103	2411	7860
YKK5604-12	500	69.4	495	93.7	0.74	1.8	0.7	6.0	114	2673	8070
YKK6301-12	560	75.6	495	93.8	0.76	1.8	0.7	6.0	179	2974	10600
YKK6302-12	630	84.9	495	93.9	0.76	1.8	0.7	6.0	191	3312	11000
YKK6303-12	710	95.6	495	94.0	0.76	1.8	0.7	6.0	208	3688	11400
YKK6304-12	800	107.5	495	94.2	0.76	1.8	0.7	6.0	272	4098	11800



外形及安装尺寸

Overall and mounting dimensions

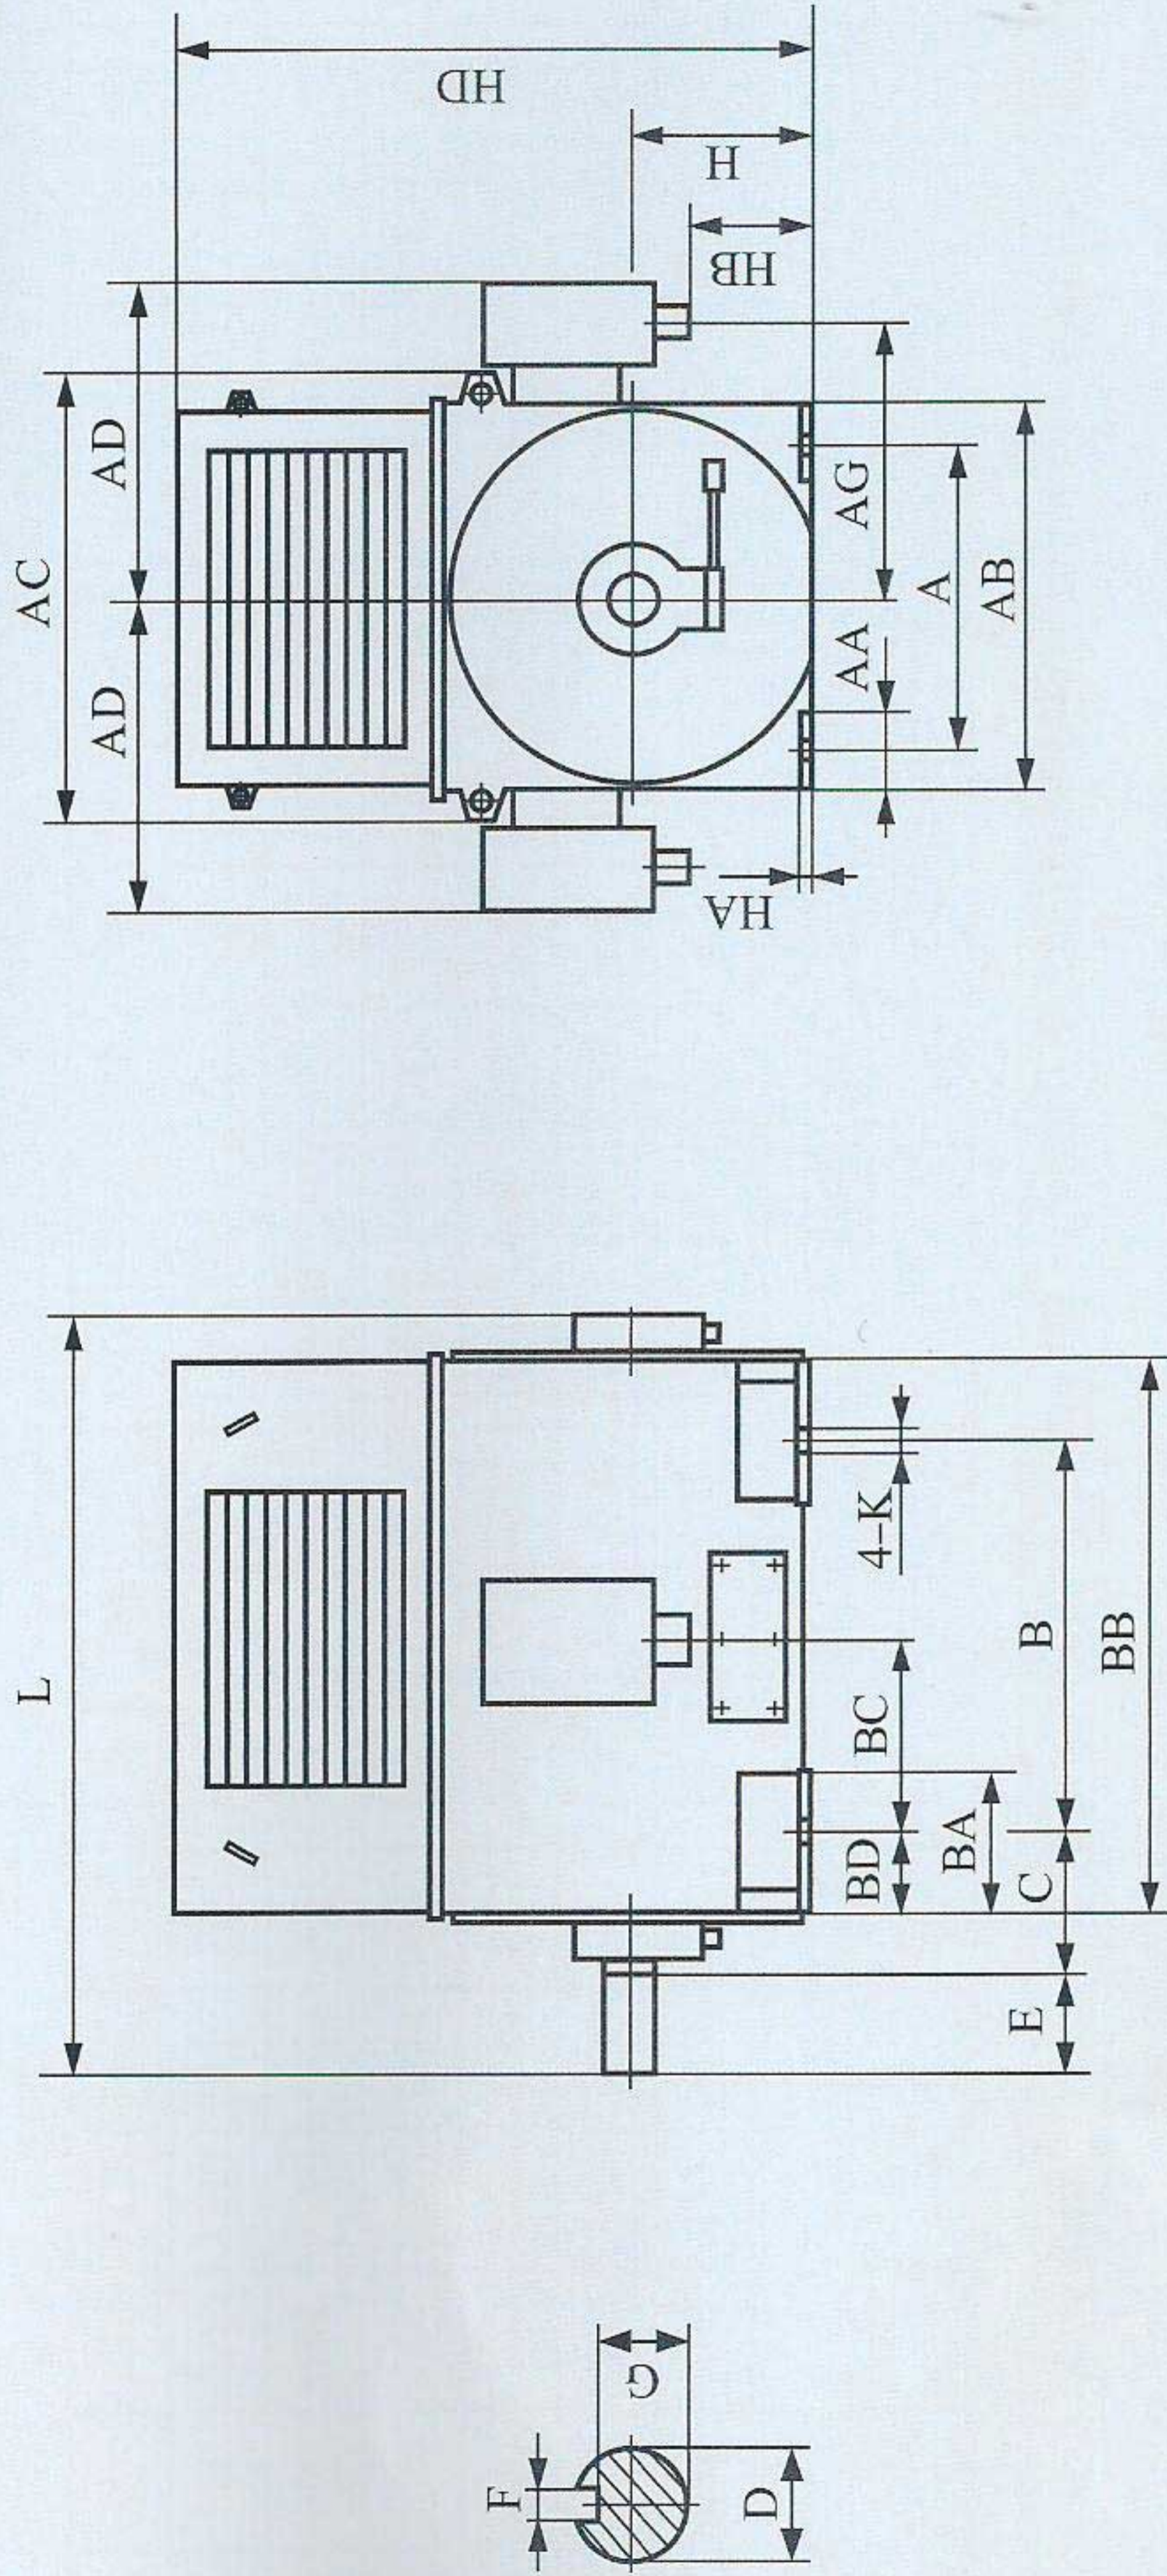


1、Y系列高压三相异步电动机（带顶罩）（6kV） Y range of high-voltage three-phase induction motors (with top cover) (6kV) mm

机座号 (H) —极数 Frame sizes(H) —No. of poles	A	AA	AB	AC	AD	AG	B	BA	BB	BC	BD	C	D	E	F	G	H	HA	HB	HD	K	L
355-2	630	208	800	1020	755	595	900	570	1360	470	210	315	80	170	22	71	355	26	90	1060	28	1750
400-2	710	208	900	1120	800	645	1000	600	1500	473	277	375	90	170	25	81	400	30	130	1180	35	1880
450-2	800	208	980	1180	840	685	1120	620	1620	504	306	400	100	210	28	90	450	40	200	1320	35	2000
500-2	900	208	1120	1320	900	755	1250	660	1730	495	370	560	110	210	28	100	500	40	320	1510	42	2350
560-2	1000	210	1220	1460	960	805	1400	720	1860	585	345	560	130	250	32	119	560	40	348	1760	42	2650
560-4	1000	210	1220	1460	960	805	1400	720	1860	570	360	500	150	250	36	138	560	40	348	1760	42	2400
630-2	1120	210	1260	1500	980	825	1600	670	2000	710	290	560	140	250	36	128	630	40	530	1920	48	2750
630-4	1120	210	1260	1500	980	825	1600	670	2000	740	260	530	170	300	40	157	630	40	530	1920	48	2800
630-6-12	1120	210	1260	1500	980	825	1600	670	2000	740	260	530	180	300	45	165	630	40	530	1920	48	2800


注：功率2000kW及以上电动机左侧带有副接线盒。

Note: For the motors of output 2000kW and more, the secondary terminal boxes are located at the left side.

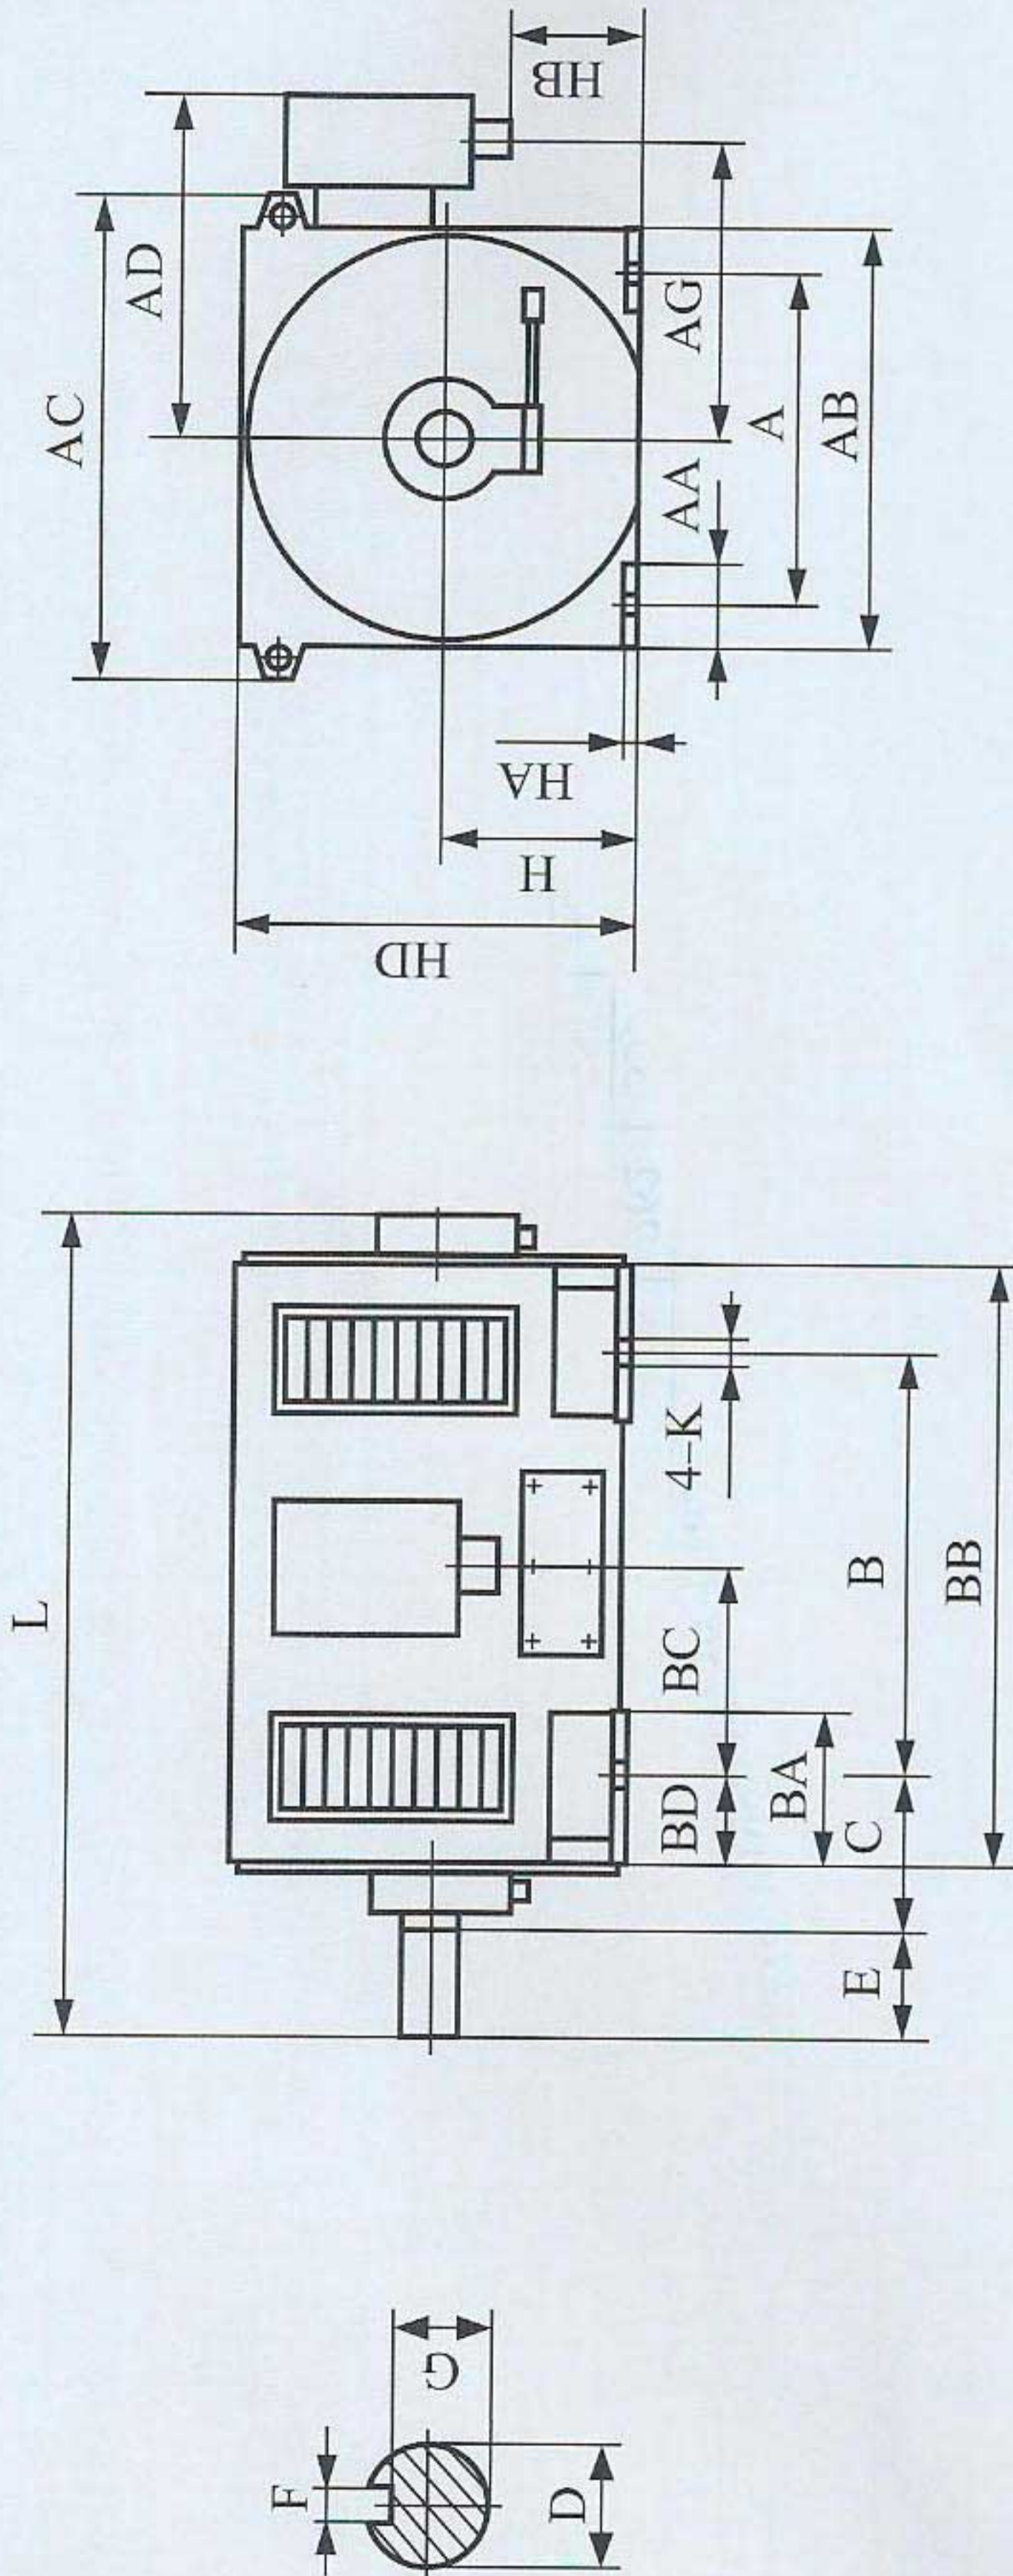

2、Y系列高压三相异步电动机（不带顶罩）（6kV） Y range of high-voltage three-phase induction motors (without top cover) (6kV)

机座号 (H) —极数 Frame sizes(H) -No. of poles	A	AA	AB	AC	AD	AG	B	BA	BB	BC	BD	C	D	E	F	G	H	HA	HB	HD	K	L
355-4-6	630	208	800	1020	755	595	900	570	1360	470	210	315	100	210	28	90	355	26	90	760	28	1790
400-4-8	710	208	900	1120	800	645	1000	600	1500	501	249	335	110	210	28	100	400	30	130	850	35	1920
450-4	800	208	980	1180	840	685	1120	620	1620	548	262	355	120	210	32	109	450	40	200	950	35	2000
450-6-12	800	208	980	1180	840	685	1120	620	1620	548	262	355	130	250	32	119	450	40	200	950	35	2040
500-4	900	208	1120	1320	910	755	1250	660	1730	510	355	475	130	250	32	119	500	40	320	1050	42	2200
500-6-12	900	208	1120	1320	910	755	1250	660	1730	510	355	475	140	250	36	128	500	40	320	1050	42	2200
560-6-12	1000	210	1220	1460	960	805	1400	720	1860	570	360	500	160	300	40	147	560	40	348	1180	42	2400

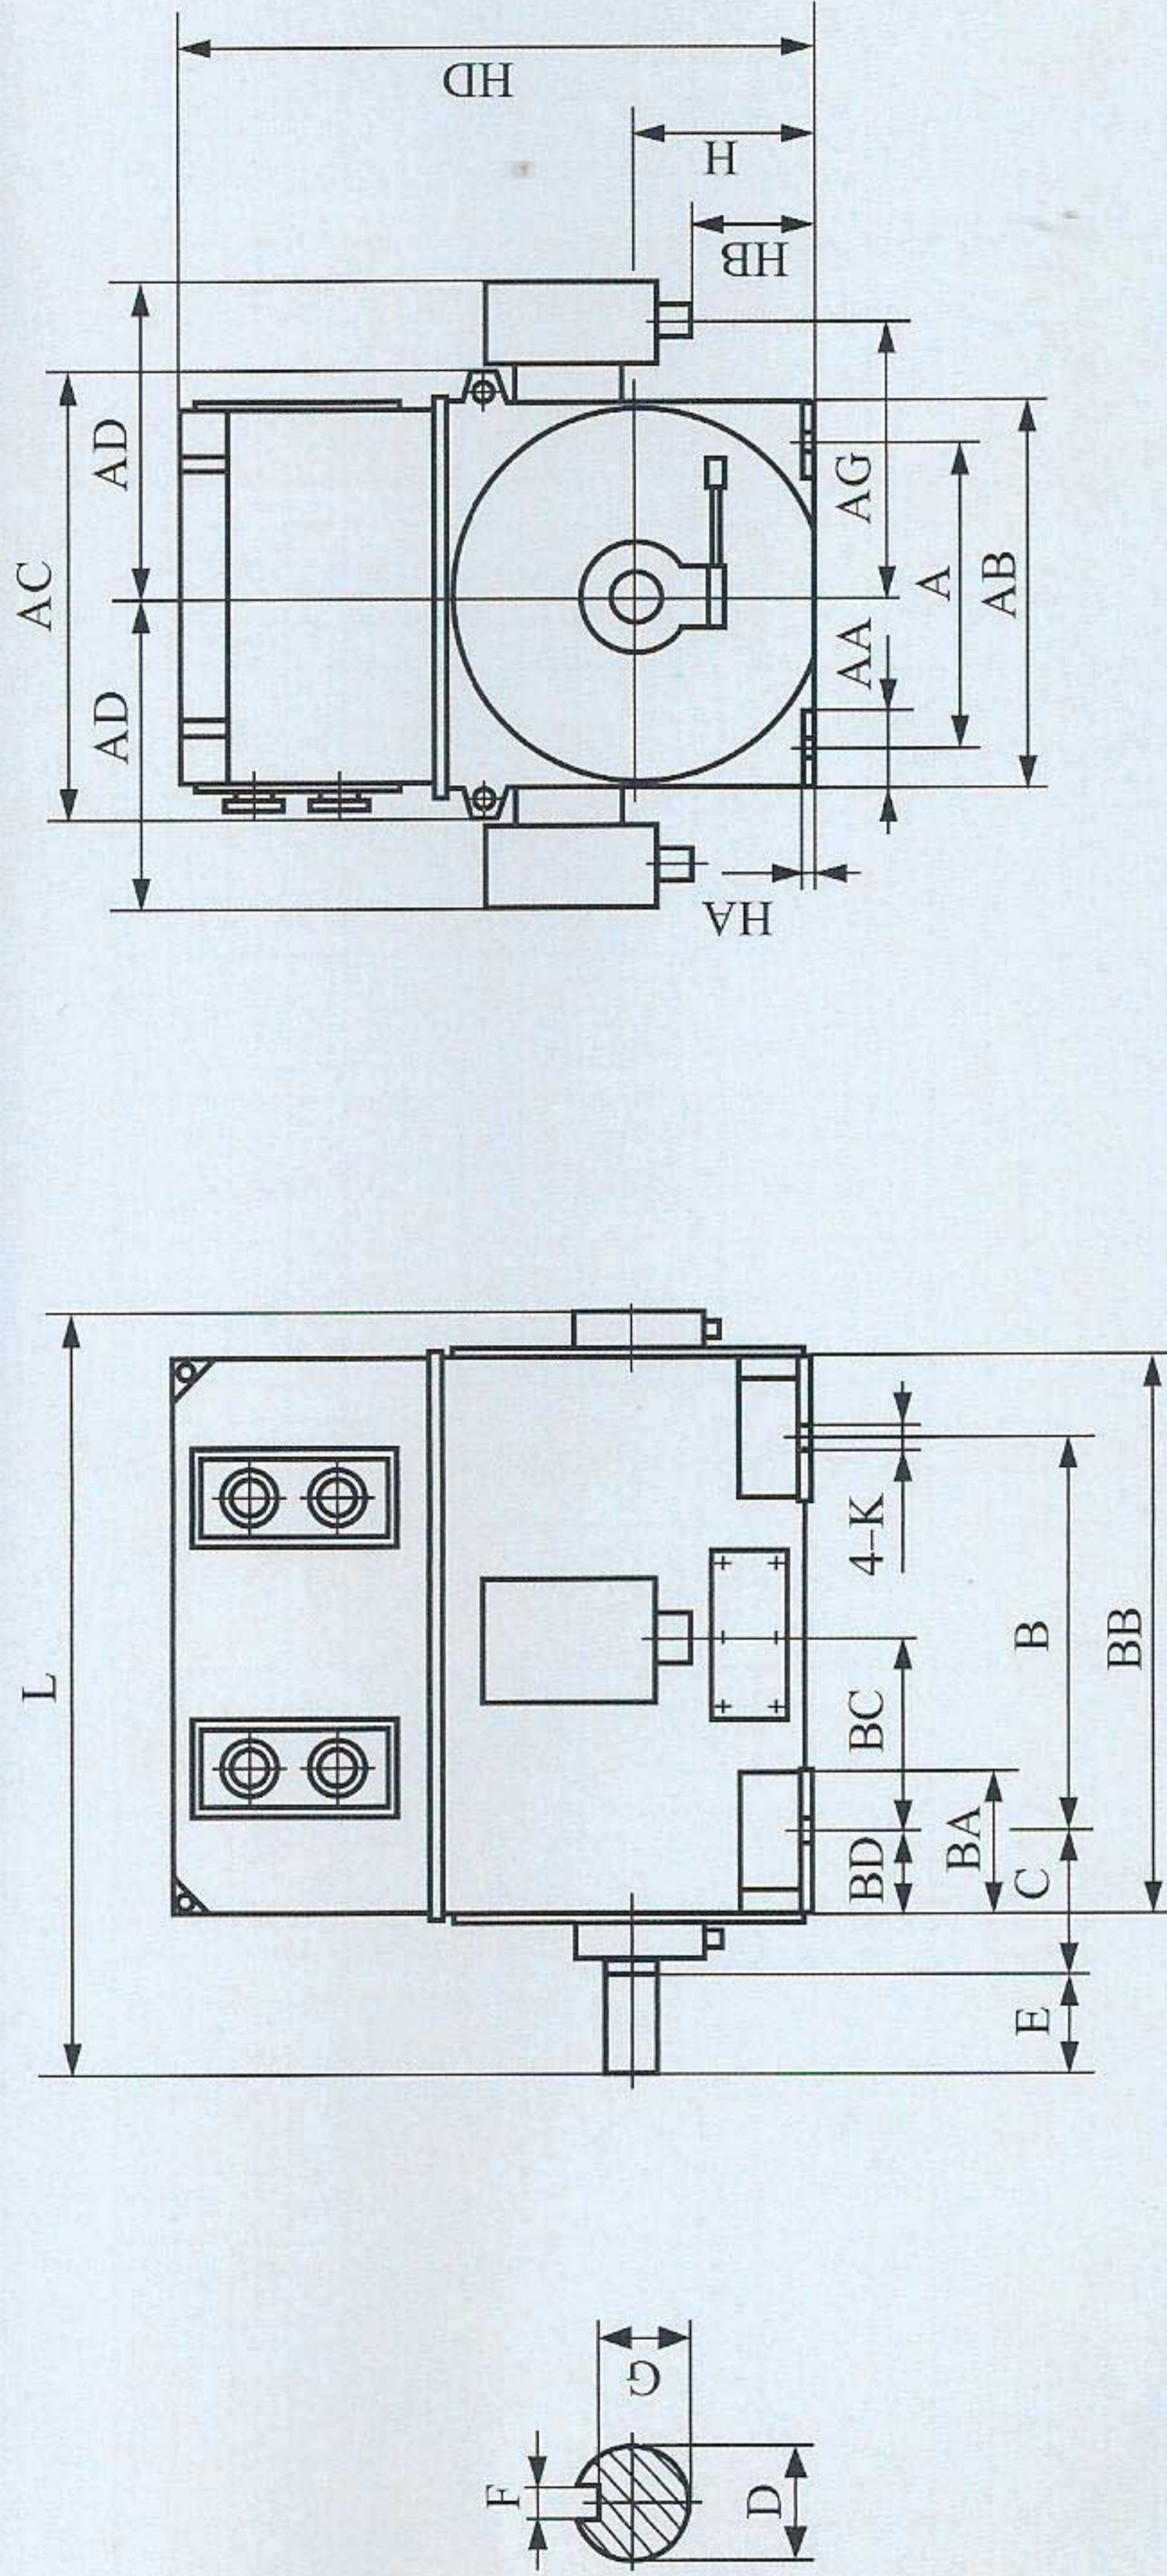


3、YKS系列高压三相异步电动机 (6kV)

mm

机座号 (H) —极数 Frame sizes (H) —No. of poles	A	AA	AB	AC	AD	AG	B	BA	BB	BC	BD	C	D	E	F	G	H	HA	HB	HD	K	L
355-2	630	208	800	1020	755	595	900	570	1360	470	210	315	80	170	22	71	355	26	90	1600	28	1750
355-4-6	630	208	800	1020	755	595	900	570	1360	470	210	315	100	210	28	90	355	26	90	1600	28	1790
400-2	710	208	900	1120	800	645	1000	600	1500	473	277	375	90	170	25	81	400	30	130	1870	35	1880
400-4-8	710	208	900	1120	800	645	1000	600	1500	501	249	335	110	210	28	100	400	30	130	1870	35	1920
450-2	800	208	980	1180	840	685	1120	620	1620	504	306	400	100	210	28	90	450	40	200	1930	35	2000
450-4	800	208	980	1180	840	685	1120	620	1620	548	262	355	120	210	32	109	450	40	200	1930	35	2000
450-6-12	800	208	980	1180	840	685	1120	620	1620	548	262	355	130	250	32	119	450	40	200	1930	35	2040
500-2	900	208	1120	1320	900	755	1250	660	1730	495	370	560	110	210	28	100	500	40	320	2080	42	2350
500-4	900	208	1120	1320	900	755	1250	660	1730	510	355	475	130	250	32	119	500	40	320	2080	42	2200
500-6-12	900	208	1120	1320	900	755	1250	660	1730	510	355	475	140	250	36	128	500	40	320	2080	42	2200
560-2	1000	210	1220	1460	960	805	1400	720	1860	585	345	560	130	250	32	119	560	40	348	2330	42	2650
560-4	1000	210	1220	1460	960	805	1400	720	1860	570	360	500	150	250	36	138	560	40	348	2330	42	2400
560-6-12	1000	210	1220	1460	960	805	1400	720	1860	570	360	500	160	300	40	147	560	40	348	2330	42	2400
630-2	1120	210	1260	1500	980	825	1600	670	2000	710	290	560	140	250	36	128	630	40	530	2850	48	2750
630-4	1120	210	1260	1500	980	825	1600	670	2000	740	260	530	170	300	40	157	630	40	530	2850	48	2800
630-6-12	1120	210	1260	1500	980	825	1600	670	2000	740	260	530	180	300	45	165	630	40	530	2850	48	2800

注：功率2000kW及以上电动机左侧带有副接线盒。机座号355-400用一个冷却器，机座号450-630用两个冷却器，进出水口纵向放置。
 Note: For the motors of output 2000kW and more, the secondary terminal boxes are located at the left side. The motors of frame sizes from 355 to 400 have one cooler which water inlet and outlet are arranged in the horizontal direction. And the motors of frame sizes from 450 to 630 have two coolers which water inlet and outlet are arranged in the vertical direction.

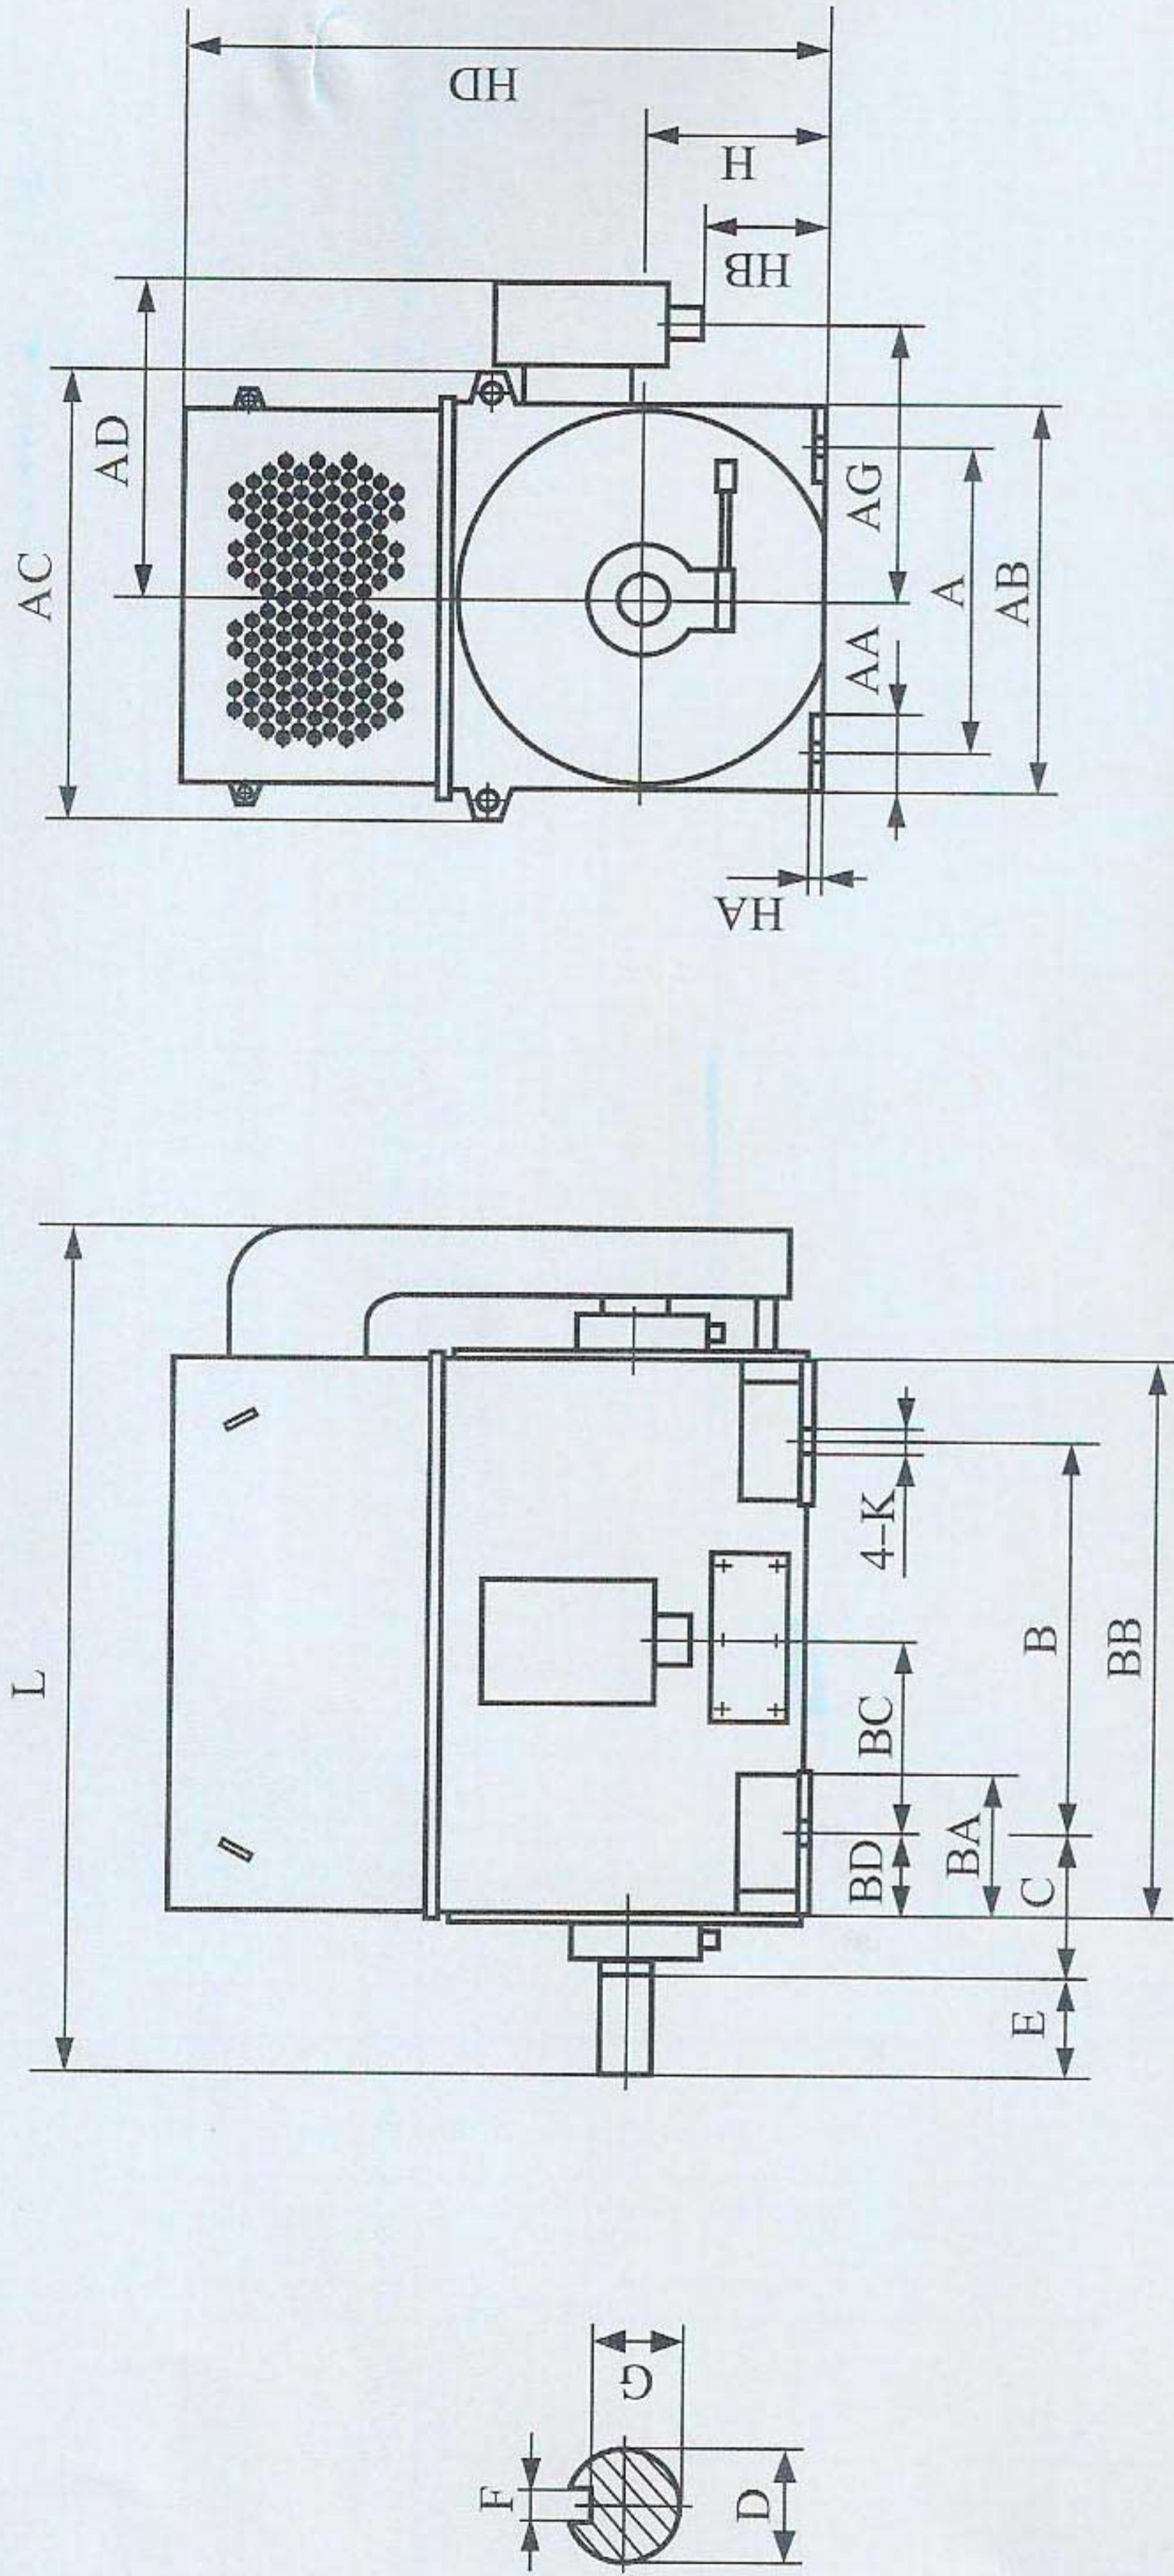

4、YKK系列高压三相异步电动机 (6kV) YKK range of high-voltage three-phase induction motors (6kV)

机座号 (H) —极数 Frame sizes(H) —No. of poles	A	AA	AB	AC	AD	AG	B	BA	BB	BC	BD	C	D	E	F	G	H	HA	HB	HD	K	L
355-2	630	208	800	1020	755	595	900	570	1360	470	210	315	80	170	22	71	355	26	90	1420	28	2030
355-4	630	208	800	1020	755	595	900	570	1360	470	210	315	100	210	28	90	355	26	90	1420	28	2070
400-2	710	208	900	1120	800	645	1000	600	1500	473	277	375	90	170	25	81	400	35	130	1460	35	2220
400-4-8	710	208	900	1120	800	645	1000	600	1500	501	249	335	110	210	28	100	400	35	130	1460	35	2250
450-2	800	208	980	1180	840	685	1120	620	1620	581	229	400	100	210	28	90	450	40	200	1660	35	2460
450-4	800	208	980	1180	840	685	1120	620	1620	548	262	355	120	210	32	109	450	40	200	1660	35	2210
450-6-12	800	208	980	1180	840	685	1120	620	1620	548	262	355	130	250	32	119	450	40	200	1660	35	2260
500-2	900	208	1120	1320	900	755	1250	660	1730	495	370	560	110	210	28	100	500	40	320	1860	42	2650
500-4	900	208	1120	1320	900	755	1250	660	1730	510	355	475	130	250	32	119	500	40	320	1860	42	2550
500-6-12	900	208	1120	1320	900	755	1250	660	1730	510	355	475	140	250	36	128	500	40	320	1860	42	2550
560-2	1000	210	1220	1460	960	805	1400	720	1860	585	345	560	130	250	32	119	560	40	348	2200	42	2840
560-4	1000	210	1220	1460	960	805	1400	720	1860	570	360	500	150	250	36	138	560	40	348	2200	42	2740
560-6-12	1000	210	1220	1460	960	805	1400	720	1860	570	360	500	160	300	40	147	560	40	348	2200	42	2760
630-2	1120	210	1260	1500	980	825	1600	670	2000	710	290	560	140	250	36	128	630	40	530	2250	48	3200
630-4	1120	210	1260	1500	980	825	1600	670	2000	740	260	530	170	300	40	157	630	40	530	2250	48	3300
630-6-12	1120	210	1260	1500	980	825	1600	670	2000	740	260	530	180	300	45	165	630	40	530	2250	48	3300

注：功率2000kW及以上电动机左侧带有副接线盒。

Note: For the motors of output 2000kW and more, the secondary terminal boxes are located at the left side.



SINOPEC 市场成员证书



CNPC 认证证书



俄罗斯防爆产品认证证书



MA 安标产品证书



ISO9001:2000 认证证书

D 订货须知

订货时请注明电动机型号、极数、额定功率、额定电压、额定频率、安装方式、防护等级、冷却方式、环境条件、旋转方向（从轴伸端视之），未注明旋转方向时，按顺时针方向供货。

如有特殊要求，请与本厂签定技术协议。

随着产品的技术进步和国内外有关标准的修订，样本内技术参数如有变动，恕不另行通知。

Ordering information

When ordering, please specify the motor type, no. of poles, Rated output, rated voltage, rated frequency, mounting arrangement, Degree of protection, method of cooling, environment conditions. And direction of rotation (viewed from the shaft extension). If Direction of rotation is not indicated, we will supply the motors According to clockwise direction.

If you have special requirements, please sign technical agreement with our company.

With technical development of products and revision of relevant standards at home and abroad, technical data shown herein are subject to change without notice.



▲航空母舰

中国·佳木斯防爆电机有限公司

JIAMUSI EXPLOSION-PROOF ELECTRIC MOTOR CO.,LTD

厂址：中国黑龙江省佳木斯市东风区建国街418号

电话：(0454) 8337673 (0454) 8337213

传真：(0454) 8337750

邮编：154005